

DIR ECT 100

REF:40005 TELESCOPIC LIGHTING TOWER

Interchangeable battery

Ultra light



THE WORLD'S LIGHTEST BATTERY-POWERED TOWER

Ultra-fast deployment in 1 second



Grip and raise the lamp head to 1.4M height to lock it automatically

MULTIDIRECTIONAL HEAD

The head can be oriented in any direction smoothly and precisely without the need for any tools



ULTRA LIGHT

Easily transportable thanks to the carrying handle



GREAT AUTONOMY

In STANDARD mode

In ECO mode

+ 8 hours x Battery
+ 4 5 hours x Battery

1 battery included with your tower. More units can be purchased separately.



Battery D24-100

Each battery offers:

45 working hours in ECO mode, 16.8 hours in BALANCED mode, 8.8 hours in STANDARD mode and 4.2

hours in TURBO mode.

Multiple batteries, charging modes and AC solutions enable efficient and productive use!




Battery charger with DC output

Allows you to recharge batteries in the charger and at the same time continue to use the light tower.

MULTIPLE INTENSITIES


You can switch between 4 different light intensity modes to suit your needs or required autonomy.

4 intensity levels with battery

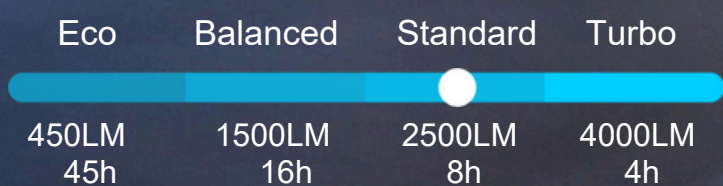





Maintenance

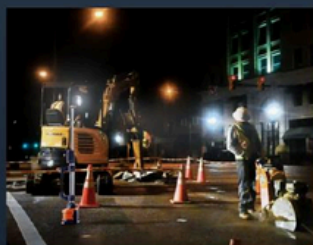


Construction

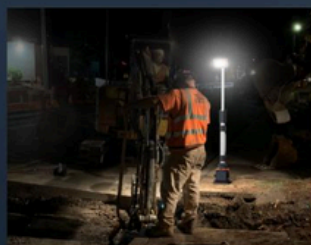

Mining

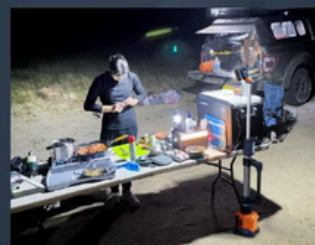

Events

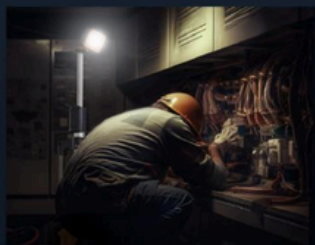

Rental



Railway




Emergencies



Camping

Only one person to use

Less than 3kg without battery.

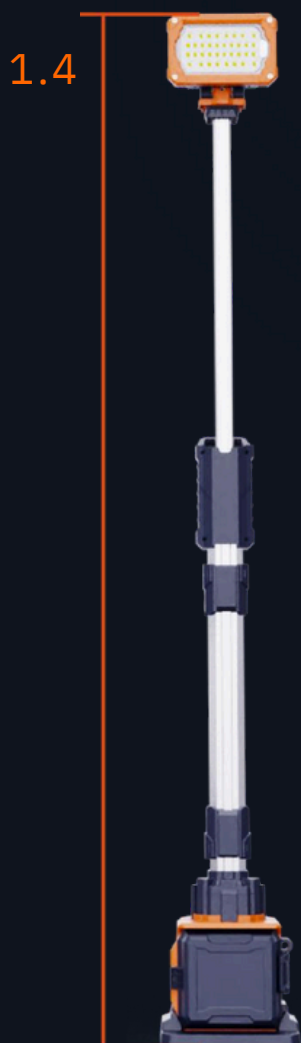

Specifications


DIRECT-100	REF: 40005
Height	0.9m~1.4m
Weight	3Kg (Without battery)
Battery type	D24-100 Including
Lumens	0 - 4,000Lm
IP Grade	IP66

Box contents




LED tower direct-100
REF: 40005
Dual battery charger MC-2
REF: 40075
Battery D24-100
REF: 40055

Dimensions (mm)

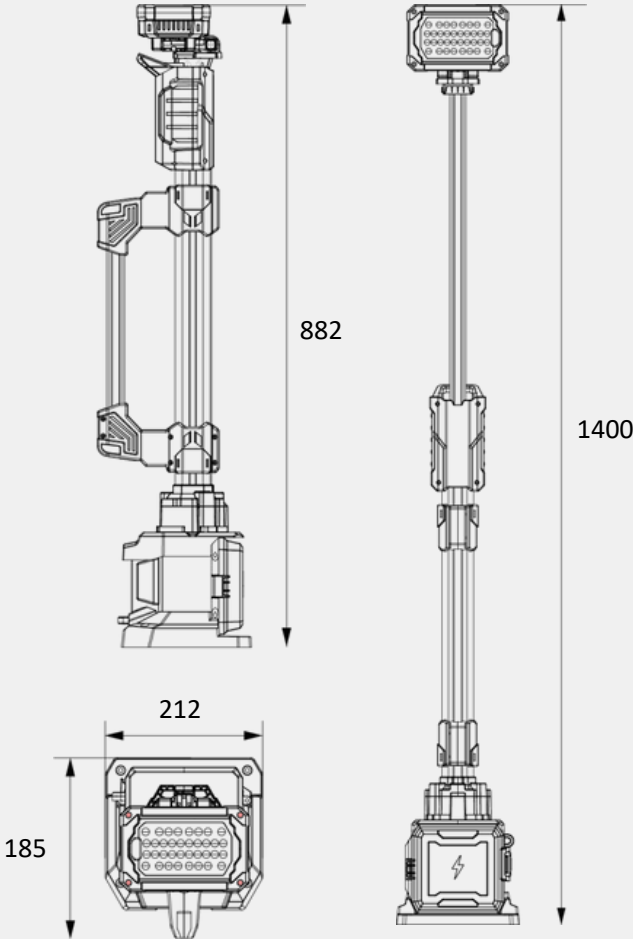

Packaging

Model	DIRECT 100
Measures	940x260x270mm
Gross weight	6.6KG±5%
Parts	1

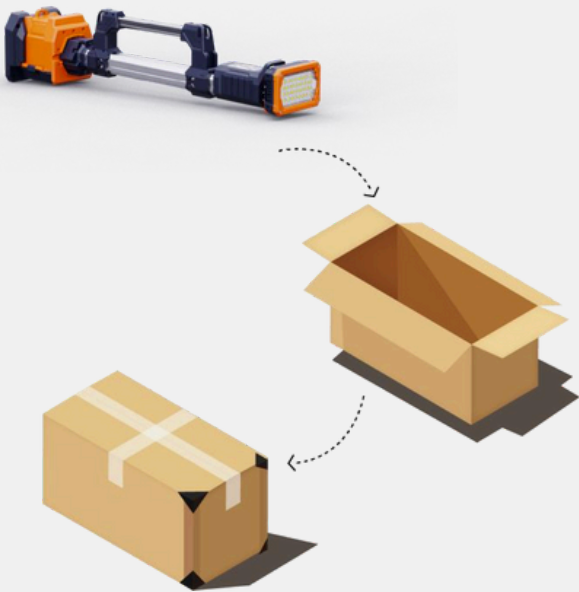

Optional accessories DIRECT 100

200W F8-200 FOLDING SOLAR PANEL
Specific for rechargeable case
+Info general catalogue
REF: 40105



CHARGING CASE TKC-9H Charges
upto 9 D24-100 batteries Solar or
AC230V mains charging
+Info general catalogue
REF: 40100

